



**WESTPOINT®**  
Create emotions



ACS

# WALL SPLIT AIR CONDITIONER INVERTER COOL AND HEAT PUMP

CLIMATISEUR SPLIT MURAL INVERTER REVERSIBLE  
AIRE ACONDICIONADO TIPO SPLIT INVERTER FRÍO Y CALOR



ENERGY  
**A+++**  
SAVING




**WIZ-09318.MH - WIZ-12318.MH**

**R32**  
9 000 Btu - 12 000 Btu




*Anti-rust protection on condenser and copper pipe included  
Protection anti-rouille incluse sur condenseur et conduit  
Protección anti-corrosión del condensador y la tubería cobre incluido*

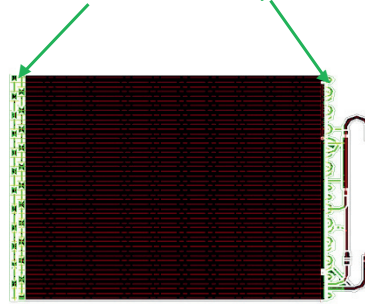

## ErP INVERTER

Grille plastique / Rejilla plástico / Plastic Grill

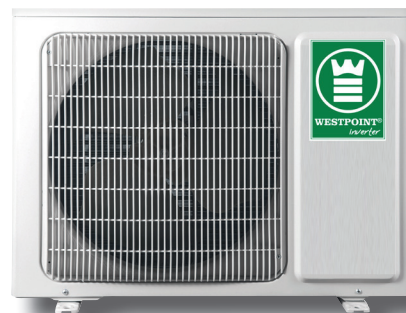

9 000 Btu  
12 000 Btu

**T1****WIZ-09318.MH****WIZ-12318.MH**

Puissance frigorifique - Capacidad refrigeración - Cooling capacity	Btu	<b>9 000</b>	<b>12 000</b>
	W	2 500	3 500
	frig/h	2 250	3 000
Puissance calorifique - Capacidad calefacción - Heating capacity	Btu	<b>10 000</b>	<b>13 000</b>
	W	3 000	3 800
	kcal/h	2 630	3 419
Froid Mini/Maxi - Refrigeración Mini/Maxi - Cooling Mini/Maxi	W	900/3800	1000/3810
	Btu	3070/12965	3400/13000
Chaud Mini/Maxi - Calefacción Mini/Maxi - Heating Mini/Maxi	W	700/4400	1200/4400
	Btu	2388/15013	4100/15010
Voltage - Voltaje - Voltage	IDU ODU V-Ph-Hz	230 V - 1 PH / 50 Hz	230 V - 1 PH / 50 Hz
Puissance absorbée froid - Consumo refrigeración - Input power cooling	W	585	950
Puissance absorbée chaud - Consumo calefacción - Input power heating	W	650	975
Intensité du courant froid - Intensidad absorbida refrigeración - Rated current cooling	A	2.6	4.0
Intensité du courant chaud - Intensidad absorbida calefacción - Rated current heating	A	2.9	4.5
Déshumidification - Capacidad de deshumidificación - Moisture removal	l/h	0.8	1.40
Circulation d'air - Caudal de aire - Air flow	m <sup>3</sup> /h	660	680
Ratio S.E.E.R. froid - S.E.E.R. refrigeración - S.E.E.R. cool	W/W	9,00	8,90
Ratio S.C.O.P. chaud - S.C.O.P. calefacción - S.C.O.P. heat	cop	5,30	5,10
Télécommande - Control remoto - Remote control		✓	✓
Type de compresseur - Tipo de compresor - Compressor type		<b>ROTARY</b>	<b>ROTARY</b>
Gaz réfrigérant + charge - Gas refrigerante + carga - Gas refrigerant + charge	g	<b>R32 - 700</b>	<b>R32 - 750</b>
<b>Unité intérieure - Unidad interior - Indoor unit</b>			
Dimensions nettes - Dimensiones netas - Net dimensions	hauteur - alto - height (mm)	290	290
	largeur - ancho - width (mm)	865	865
	profondeur - profundidad - depth (mm)	210	210
Poids net - Peso neto - Net weight	kg	10,5	11,0
Niveau de pression acoustique (H/M/B) - Nivel de presión de sonido (A/M/B) - Sound pressure level (H/M/L)	dB(A)	41/39/24	43/39/25
<b>Unité extérieure - Unidad exterior - Outdoor unit</b>			
Dimensions nettes - Dimensiones netas - Net dimensions	hauteur - alto - height (mm)	596	596
	largeur - ancho - width (mm)	848	848
	profondeur - profundidad - depth (mm)	320	320
Poids net - Peso neto - Net weight	kg	33,5	33,5
Niveau de pression acoustique - Nivel de presión de sonido - Sound pressure level	dB(A)	52	53
<b>Tuyau de connexion - Conexiones - Connection pipe</b>			
Diamètre liquide - Conexiones frigoríficas líquidas - Diameter liquid	mm (inch)	ø6 (1/4")	ø6 (1/4")
Connexions gaz - Conexiones frigoríficas gas - Gas connexion	mm (inch)	ø9.52 (3/8")	ø9.52 (3/8")
Longueur maximale autorisée - Longitud tubería máxima - Maxi length	m	15	15
Minuterie - Programador - Timer	h	24	24
Contrôle digital - Control digital - Digital control		✓	✓
Standard - Estandar - Standard		<b>CE - RoHS</b>	<b>CE - RoHS</b>
Classe énergétique - Etiqueta de consumo - Energy label		<b>A+++ / A+++</b>	<b>A+++ / A+++</b>